



Tru-Weld Equipment Stud Welding Portable Generator System



Total length to the hitch: 226" (574cm) Width including wheel fenders: 68" (173cm)
Height including lifting hooks: 94" (234cm)

The "critical silence" muffler is housed in the weather proof enclosure of the system and not mounted on top. This reduces the overall height and also assists in sound attenuation of the muffler.



The entire weather-proof enclosure is made from aluminum to resist rusting and reduce overall weight. All doors have the same door handles and are all keyed the same.



Tru-Weld Equipment Stud Welding Portable Generator System



The entire weather proof enclosure is lined with sound proofing materials to minimize operating noise of the generator to 65db in 23 feet (7 meters).




The stud welder compartment door and the generator operations panel door are equipped with small glass fronted access doors so that the main doors don't have to be opened during operation of the generator to facilitate changes for the stud welder or generator when necessary.



Tru-Weld Equipment Stud Welding Portable Generator System



All access doors are removable for easy maintenance and service of both generator and stud welder.

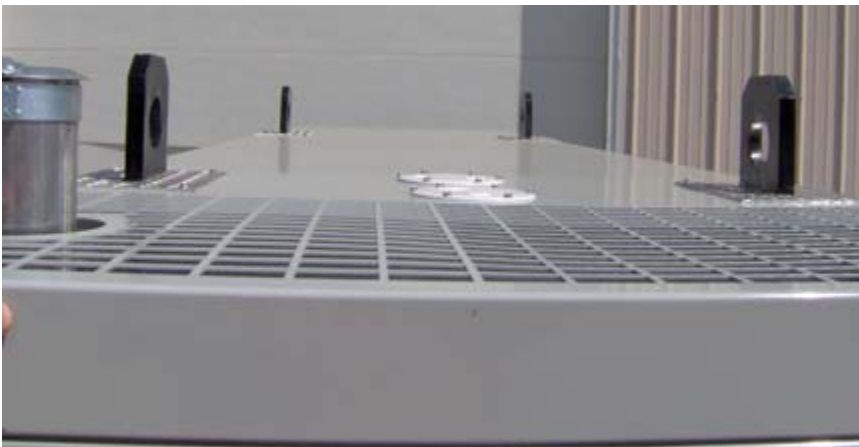

The generator system has four (4) lifting points for easy and safe handling when it is required to lift the unit by crane. Any two (2) diagonal hooks can support the weight of the entire unit safely.

[Contact a Truweld Sales Representative for more information;](#)

Tru-Weld Equipment
6400 North Honeytown Road
Smithville, Ohio 44677
TWE@TFPCorp.com

Phone (330)669-2773

Fax (330)669-2473